

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 58-209059
(43)Date of publication of application : 05.12.1983

(51)Int.Cl.

H01M 2/08
H01M 2/12

(21)Application number : 57-091575
(22)Date of filing : 28.05.1982


(71)Applicant : MATSUSHITA ELECTRIC IND CO LTD
(72)Inventor : MIZUTANI KIYOHICO
KAWAKAMI KOICHIRO
SHIGA MASAOKI

54) DRY BATTERY

57)Abstract:

PURPOSE: To increase storage life by installing a cutting off portion for gas release on the inner surface of a resin mold cap of a sealing cover and using an inner sealant obtained by mixing a specified ratio of paraffin or wax to a mixture of asphalt and mineral oil.

CONSTITUTION: A cutting off portion 2 for gas release which releases gas suddenly generating in abnormal discharge such as short or reverse connection is formed in a resin mold cap 1 of a sealing cover. The lower surface of a flange of a cathode terminal cap 1 which is molded with resin of the sealing cover 1 is exposed in the cutting off portion 2 which reaches the top end of the flange of the cap. An inner sealant 3 is prepared by mixing at a ratio of 8:2~9.5: 0.5 paraffin or wax to a mixture of asphalt and mineral oil. The sealant 3 is filled via a washer 5. Therefore, rupture generating in abnormal discharge such as reverse connection is prevented and sealing effect is kept in normal condition and storage performance is improved.

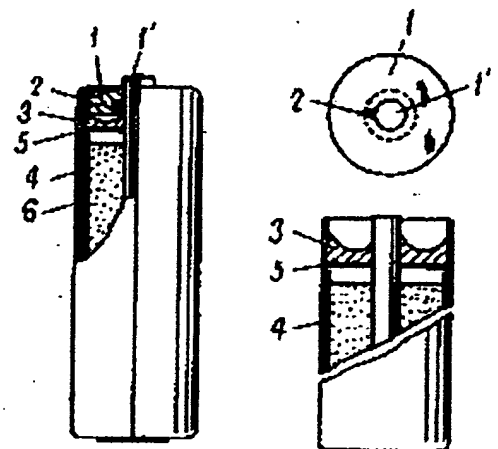

LEGAL STATUS

Date of request for examination]

Date of sending the examiner's decision of rejection]

Kind of final disposal of application other than the
examiner's decision of rejection or application
converted registration]

Date of final disposal for application]

Patent number]

Date of registration]

Number of appeal against examiner's decision of
rejection]

Date of requesting appeal against examiner's decision
of rejection]

Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office